

Product identification 產品描述:

WF8 T 10 4 6

① ② ③ ④ ⑤

- ① Material number 材質編號
- ② Product shape 產品形狀
- ③ Core outer diameter 鐵芯外徑尺寸
- ④ Core Height size 鐵芯高度尺寸
- ⑤ Core inside diameter 鐵芯內徑尺寸


Product introduction 產品介紹:

- External products for circular cables
圓形電纜的外部產品
- Various shapes and materials variety
各種形狀和材質品種豐富
- The number of coils can give play to noise countermeasures.
線圈的数量可以發揮噪聲對策的作用。
- Ferrite core has high frequency absorption characteristics, so it has excellent High frequency noise absorption effect.
鐵氧體磁芯具有高频吸收特性，具有优异的性能高频吸声效果。

Product application 產品應用:

- Computer line, USB line, printer line, display line, digital camera line, fax, Copier communication equipment, etc.
電腦線，USB線，打印機線，顯示線，數碼相機線，傳真，復印機通訊設備等。

● **Shape and size 形狀與尺寸:**

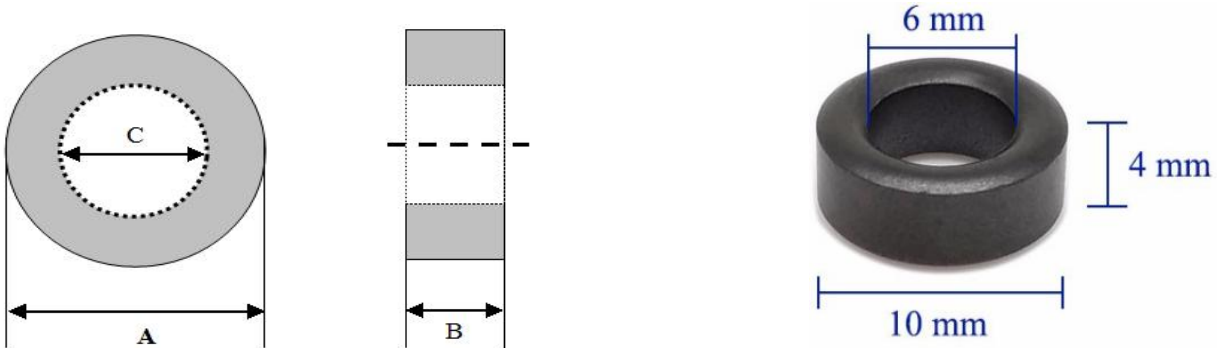

● **Detailed specification and parameter introduction**

詳細規格及參數介紹:

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω)min	
					25 MHz	100 MHz
1	WF8 T3*3*1.2	3.0 \pm 0.3	3.0 \pm 0.3	1.2 \pm 0.3	22	66
2	WF8 T3.5*2*1.8	3.5 \pm 0.4	2.0 \pm 0.4	1.8 \pm 0.3	24	65
3	WF8 T3.5*3*1.0	3.5 \pm 0.4	3.0 \pm 0.4	1.0 \pm 0.3	35	80
4	WF8 T3.5*3*0.8	3.5 \pm 0.4	3.0 \pm 0.4	0.8 \pm 0.3	33	84
5	WF8 T3.5*3*1.8	3.5 \pm 0.4	3.0 \pm 0.4	1.8 \pm 0.3	20	65
6	WF8 T3.5*3.2*1.6	3.5 \pm 0.4	3.2 \pm 0.4	1.6 \pm 0.3	20	65
7	WF8 T3.5*4*1.8	3.5 \pm 0.3	4.0 \pm 0.3	1.8 \pm 0.2	20	58
8	WF8 T2.5*1.3*1.3	2.5 \pm 0.3	1.3 \pm 0.3	1.3 \pm 0.3	10	50
9	WF8 T4*1*2	4 \pm 0.4	1 \pm 0.3	2 \pm 0.3	15	60
10	WF8 T4*2*2	4 \pm 0.4	2 \pm 0.4	2 \pm 0.3	22	68
11	WF8 T4*3*2	4 \pm 0.4	3 \pm 0.4	2 \pm 0.3	20	65
12	WF8 T4*4*1.5	4 \pm 0.4	4 \pm 0.4	1.5 \pm 0.3	30	77
13	WF8 T4*4*2	4 \pm 0.4	4 \pm 0.4	2 \pm 0.3	20	70
14	WF8 T5*2.5*3	5 \pm 0.4	2.5 \pm 0.4	3 \pm 0.3	15	65
15	WF8 T5*4*3	5 \pm 0.4	4 \pm 0.4	3 \pm 0.3	20	65
16	WF8 T5*5*3	5 \pm 0.4	5 \pm 0.4	3 \pm 0.3	25	70
17	WF8 T6*2*3	6 \pm 0.4	2 \pm 0.3	3 \pm 0.3	15	60

● Detailed specification and parameter introduction

詳細規格及參數介紹：

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω)min	
					25 MHz	100 MHz
18	WF8 T6*3*3	6 \pm 0.4	3 \pm 0.4	3 \pm 0.3	20	65
19	WF8 T6*3*4	6 \pm 0.4	3 \pm 0.4	4 \pm 0.4	15	60
20	WF8 T6*4*3	6 \pm 0.4	4 \pm 0.4	3 \pm 0.3	25	70
21	WF8 T6*4*4	6 \pm 0.4	4 \pm 0.4	4 \pm 0.4	20	65
22	WF8 T6*6*3	6 \pm 0.4	6 \pm 0.4	3 \pm 0.3	25	75
23	WF8 T6*6*4	6 \pm 0.4	6 \pm 0.4	4 \pm 0.4	20	65
24	WF8 T6.5*5*4	6.5 \pm 0.4	5 \pm 0.4	4 \pm 0.4	20	70
25	WF8 T6.5*5*4.3	6.5 \pm 0.4	5 \pm 0.4	4.3 \pm 0.4	20	65
26	WF8 T7*7*4	7 \pm 0.4	7 \pm 0.4	4 \pm 0.4	25	80
27	WF8 T7.6*2*5.3	7.6 \pm 0.4	2 \pm 0.4	5.3 \pm 0.4	15	60
28	WF8 T7.6*3.6*4.2	7.6 \pm 0.4	3.6 \pm 0.4	4.2 \pm 0.4	20	70
29	WF8 T7.6*5*5.2	7.6 \pm 0.4	5 \pm 0.4	5.2 \pm 0.4	20	65
30	WF8 T7.6*6*5	7.6 \pm 0.4	6 \pm 0.4	5 \pm 0.4	20	70
31	WF8 T8*2*4	8 \pm 0.4	2 \pm 0.4	4 \pm 0.4	15	60
32	WF8 T8*3*4	8 \pm 0.4	3 \pm 0.4	4 \pm 0.4	20	65
33	WF8 T8*4*4	8 \pm 0.4	4 \pm 0.4	4 \pm 0.4	28	75
34	WF8 T8*6.3*5.6	8 \pm 0.4	6.3 \pm 0.4	5.6 \pm 0.4	22	73
35	WF8 T8*7*6	8 \pm 0.4	7 \pm 0.4	6 \pm 0.4	21	66
36	WF8 T8*7.5*5.3	8 \pm 0.4	7.5 \pm 0.4	5.3 \pm 0.4	24	77
37	WF8 T8*8*4	8 \pm 0.4	8 \pm 0.4	4 \pm 0.4	36	92
38	WF8 T9*3*5	9 \pm 0.4	3 \pm 0.4	5 \pm 0.4	22	65
39	WF8 T9.1*4.6*5	9.1 \pm 0.4	4.6 \pm 0.4	5 \pm 0.4	22	75
40	WF8 T9*4.5*5	9 \pm 0.4	4.5 \pm 0.4	5 \pm 0.4	21	75
41	WF8 T9*8*5	9 \pm 0.4	8 \pm 0.4	5 \pm 0.4	33	85
42	WF8 T9.5*5*5	9.5 \pm 0.4	5 \pm 0.4	5 \pm 0.4	22	75
43	WF8 T9.5*9.5*5	9.5 \pm 0.4	9.5 \pm 0.4	5 \pm 0.4	35	90
44	WF8 T9.8*6.5*6	9.8 \pm 0.4	6.5 \pm 0.4	6 \pm 0.4	25	75
45	WF8 T10*2*6	10 \pm 0.4	2 \pm 0.4	6 \pm 0.4	15	60
46	WF8 T10*3*6	10 \pm 0.4	3 \pm 0.4	6 \pm 0.4	20	60
47	WF8 T10*4*6	10 \pm 0.4	4 \pm 0.4	6 \pm 0.4	20	65
48	WF8 T10*4*7	10 \pm 0.4	4 \pm 0.4	7 \pm 0.4	20	60

● Detailed specification and parameter introduction

詳細規格及參數介紹：

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω)min	
					25 MHz	100 MHz
49	WF8 T10*5*5	10 \pm 0.4	5 \pm 0.4	5 \pm 0.4	28	77
50	WF8 T10*5*6	10 \pm 0.4	5 \pm 0.4	6 \pm 0.4	22	76
51	WF8 T10*6*6	10 \pm 0.4	6 \pm 0.5	6 \pm 0.4	26	77
52	WF8 T10*5*7	10 \pm 0.4	5 \pm 0.4	7 \pm 0.4	22	66
53	WF8 T10*7*6	10 \pm 0.4	7 \pm 0.4	6 \pm 0.4	25	75
54	WF8 T10*7.5*6	10 \pm 0.4	7.5 \pm 0.4	6 \pm 0.4	25	80
55	WF8 T10*7*7	10 \pm 0.4	7 \pm 0.4	7 \pm 0.4	25	74
56	WF8 T10*7.5*7	10 \pm 0.4	7.5 \pm 0.4	7 \pm 0.4	25	70
57	WF8 T10*8*6	10 \pm 0.4	8 \pm 0.4	6 \pm 0.4	30	80
58	WF8 T10*10*4.2	10 \pm 0.4	10 \pm 0.4	4.2 \pm 0.4	55	115
59	WF8 T10*10*5	10 \pm 0.4	10 \pm 0.4	5 \pm 0.4	35	85
60	WF8 T10*10*6	10 \pm 0.4	10 \pm 0.4	6 \pm 0.4	35	85
61	WF8 T10*10*7	10 \pm 0.4	10 \pm 0.4	7 \pm 0.4	30	80
62	WF8 T10.5*10*7.3	10.5 \pm 0.4	10 \pm 0.4	7.3 \pm 0.4	25	75
63	WF8 T10*20*4.2	10 \pm 0.4	20 \pm 0.6	4.2 \pm 0.4	100	200
64	WF8 T11*8*5	11 \pm 0.5	8 \pm 0.4	5 \pm 0.4	30	90
65	WF8 T12*4*6	12 \pm 0.5	4 \pm 0.4	6 \pm 0.4	25	70
66	WF8 T12*5*8	12 \pm 0.5	5 \pm 0.4	8 \pm 0.4	20	65
67	WF8 T12*5.3*7.3	12 \pm 0.5	5.3 \pm 0.4	7.3 \pm 0.4	20	75
68	WF8 T12*5.5*7	12 \pm 0.5	5.5 \pm 0.4	7 \pm 0.4	20	70
69	WF8 T12*6*6	12 \pm 0.5	6 \pm 0.4	6 \pm 0.4	25	80
70	WF8 T12*6*7.3	12 \pm 0.5	6 \pm 0.4	7.3 \pm 0.4	25	70
71	WF8 T12*7*8	12 \pm 0.5	7 \pm 0.4	8 \pm 0.4	20	70
72	WF8 T12*8*6	12 \pm 0.5	8 \pm 0.4	6 \pm 0.4	35	85
73	WF8 T12*8*7	12 \pm 0.5	8 \pm 0.4	7 \pm 0.4	30	85
74	WF8 T12*9*5.6	12 \pm 0.5	9 \pm 0.4	5.6 \pm 0.4	40	105
75	WF8 T12*10*3.55	12 \pm 0.5	10 \pm 0.4	3.5 \pm 0.4	85	180
76	WF8 T12*10*7	12 \pm 0.5	10 \pm 0.4	7 \pm 0.4	35	85
77	WF8 T12*12*5.6	12 \pm 0.5	12 \pm 0.5	5.6 \pm 0.4	45	110
78	WF8 T12*12*6.5	12 \pm 0.5	12 \pm 0.5	6.5 \pm 0.4	40	95
79	WF8 T12*12*8	12 \pm 0.5	12 \pm 0.5	8 \pm 0.4	35	90

● Detailed specification and parameter introduction

詳細規格及參數介紹：

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω)min	
					25 MHz	100 MHz
80	WF8 T12.5*6.5*5	12.5±0.4	6.5±0.4	5±0.4	35	85
81	WF8 T12.5*12*8	12.5±0.4	12±0.5	8±0.4	35	90
82	WF8 T12.7*6.35*7.9	12.7±0.5	6.35±0.4	7.9±0.4	25	70
83	WF8 T12.7*4.8*7.9	12.7±0.5	4.8±0.4	7.9±0.4	20	70
84	WF8 T12.7*9.6*7.9	12.7±0.5	9.6±0.4	7.9±0.4	30	90
85	WF8 T12.7*12.7*7.3	12.7±0.5	12.7±0.5	7.3±0.4	45	100
86	WF8 T12.7*12.7*7.9	12.7±0.5	12.7±0.5	7.9±0.4	40	95
87	WF8 T12.7*12.7*11	12.7±0.5	12.7±0.5	11±0.5	20	70
88	WF8 T13*3*7	13±0.5	3±0.4	7±0.4	20	65
89	WF8 T13*6.3*7	13±0.5	6.3±0.4	7±0.4	25	75
90	WF8 T13*6.5*8	13±0.5	6.5±0.4	8±0.4	20	70
91	WF8 T13*7*7	13±0.5	7±0.4	7±0.4	30	80
92	WF8 T13*10*8.2	13±0.5	10±0.4	8.2±0.4	30	85
93	WF8 T13*12.7*7.1	13±0.5	12.7±0.5	7.1±0.4	40	100
94	WF8 T14*4*8	14±0.5	4±0.4	8±0.4	20	70
95	WF8 T14*5*8	14±0.5	5±0.4	8±0.4	20	70
96	WF8 T14*5*9	14±0.5	5±0.4	9±0.5	20	70
97	WF8 T14*5.5*9	14±0.5	5.5±0.4	9±0.5	20	70
98	WF8 T14*14*10	14±0.5	14±0.5	10±0.5	35	90
99	WF8 T14.2*5*10	14.2±0.5	5±0.4	10±0.5	20	65
100	WF8 T14.2*5.5*8.7	14.2±0.5	5.5±0.4	8.7±0.4	20	70
101	WF8 T14.2*7*8	14.2±0.5	7±0.4	8±0.4	25	80
102	WF8 T14.2*8*9	14.2±0.5	8±0.4	9±0.5	25	75
103	WF8 T14.2*10*8	14.2±0.5	10±0.4	8±0.4	35	95
104	WF8 T14.2*8*10	14.2±0.5	8±0.4	10±0.5	20	70
105	WF8 T14.2*10.16*6.35	14.2±0.5	10.16±0.4	6.35±0.4	40	100
106	WF8 T14.2*12*7.8	14.2±0.5	12±0.5	7.8±0.4	45	105
107	WF8 T14.2*12.7*6.7	14.2±0.5	12.7±0.5	6.7±0.4	50	110
108	WF8 T14.2*13*8	14.2±0.5	13±0.5	8±0.4	45	110
109	WF8 T14.2*13.8*6.35	14.2±0.5	13.8±0.5	6.35±0.4	50	130
110	WF8 T14.5*8*10	14.5±0.5	8±0.4	10±0.5	25	70

● Detailed specification and parameter introduction

詳細規格及參數介紹：

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω)min	
					25 MHz	100 MHz
111	WF8 T15*5*10	15 \pm 0.5	5 \pm 0.4	10 \pm 0.5	20	65
112	WF8 T15*15*10.5	15 \pm 0.5	15 \pm 0.5	10.5 \pm 0.5	30	90
113	WF8 T15.2*12.5*10.5	15.2 \pm 0.5	12.5 \pm 0.5	10.5 \pm 0.5	30	85
114	WF8 T15.6*14*13.4	15.6 \pm 0.5	14 \pm 0.5	13.4 \pm 0.5	25	75
115	WF8 T15.87*14.3*7.9	15.87 \pm 0.5	14.3 \pm 0.5	7.9 \pm 0.4	55	125
116	WF8 T16*4*9	16 \pm 0.5	4 \pm 0.4	9 \pm 0.5	20	70
117	WF8 T16*4*10	16 \pm 0.5	4 \pm 0.4	10 \pm 0.5	20	65
118	WF8 T16*5*10	16 \pm 0.5	5 \pm 0.4	10 \pm 0.5	20	70
119	WF8 T16*5.4*9	16 \pm 0.5	5.4 \pm 0.4	9 \pm 0.5	20	70
120	WF8 T16*7*9	16 \pm 0.5	7 \pm 0.4	9 \pm 0.5	30	80
121	WF8 T16*7*10	16 \pm 0.5	7 \pm 0.4	10 \pm 0.5	25	75
122	WF8 T16*8*10	16 \pm 0.5	8 \pm 0.4	10 \pm 0.5	25	80
123	WF8 T16*8*12	16 \pm 0.5	8 \pm 0.4	12 \pm 0.5	20	70
124	WF8 T16*10*7	16 \pm 0.5	10 \pm 0.4	7 \pm 0.4	40	105
125	WF8 T16*10*8	16 \pm 0.5	10 \pm 0.4	8 \pm 0.4	45	105
126	WF8 T16*10*9	16 \pm 0.5	10 \pm 0.4	9 \pm 0.5	40	95
127	WF8 T16*10*10	16 \pm 0.5	10 \pm 0.4	10 \pm 0.5	30	85
128	WF8 T16*10*12	16 \pm 0.5	10 \pm 0.4	12 \pm 0.5	25	75
129	WF8 T16*12*9.5	16 \pm 0.5	12 \pm 0.5	9.5 \pm 0.5	30	90
130	WF8 T16*12*10	16 \pm 0.5	12 \pm 0.5	10 \pm 0.5	30	90
131	WF8 T16*13*8	16 \pm 0.5	13 \pm 0.5	8 \pm 0.4	45	115
132	WF8 T16*13*9	16 \pm 0.5	13 \pm 0.5	9 \pm 0.5	40	100
133	WF8 T16*14*10	16 \pm 0.5	14 \pm 0.5	10 \pm 0.5	40	100
134	WF8 T16*15*9	16 \pm 0.5	15 \pm 0.5	9 \pm 0.5	50	115
135	WF8 T16*16*8	16 \pm 0.5	16 \pm 0.5	8 \pm 0.4	65	130
136	WF8 T16*16*9	16 \pm 0.5	16 \pm 0.5	9 \pm 0.5	50	115
137	WF8 T16*16*10	16 \pm 0.5	16 \pm 0.5	10 \pm 0.5	50	110
138	WF8 T17.5*6.35*9.5	17.5 \pm 0.6	6.35 \pm 0.4	9.5 \pm 0.5	25	75
139	WF8 T17.5*7*9.6	17.5 \pm 0.6	7 \pm 0.4	9.6 \pm 0.5	30	85
140	WF8 T17.5*10*8	17.5 \pm 0.6	10 \pm 0.4	8 \pm 0.4	40	100
141	WF8 T17.5*11*9.5	17.5 \pm 0.6	11 \pm 0.5	9.5 \pm 0.5	40	90

● Detailed specification and parameter introduction

詳細規格及參數介紹：

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω)min	
					25 MHz	100 MHz
142	WF8 T17.5*12*11.3	17.5±0.6	12±0.5	11.3±0.5	30	90
143	WF8 T17.5*12.5*12	17.5±0.6	12.5±0.5	12±0.5	30	90
144	WF8 T17.5*9.5*12.7	17.5±0.6	9.5±0.4	12.7±0.5	25	80
145	WF8 T17.5*12.7*9.5	17.5±0.6	12.7±0.5	9.5±0.5	45	110
146	WF8 T17.5*12.7*10.7	17.5±0.6	12.7±0.5	10.7±0.5	40	95
147	WF8 T17.5*13.5*9.5	17.5±0.6	13.5±0.5	9.5±0.5	50	110
148	WF8 T17.5*15*9.5	17.5±0.6	15±0.5	9.5±0.5	55	125
149	WF8 T18*6*10	18±0.6	6±0.4	10±0.5	25	75
150	WF8 T18*7*10	18±0.6	7±0.4	10±0.5	30	80
151	WF8 T18*8*10	18±0.6	8±0.4	10±0.5	30	85
152	WF8 T18*10*10	18±0.6	10±0.4	10±0.5	35	90
153	WF8 T18*12*10	18±0.6	12±0.5	10±0.5	45	105
154	WF8 T18*12*12	18±0.6	12±0.5	12±0.5	30	85
155	WF8 T18*14*10	18±0.6	14±0.5	10±0.5	50	110
156	WF8 T18*15*10	18±0.6	15±0.5	10±0.5	50	120
157	WF8 T18*18*10	18±0.6	18±0.6	10±0.5	70	130
158	WF8 T18.2*6.4*11.2	18.2±0.6	6.4±0.4	11.2±0.5	20	75
159	WF8 T18.2*6.5*10	18.2±0.6	6.5±0.4	10±0.5	25	80
160	WF8 T18.4*9.6*12.5	18.4±0.6	9.6±0.4	12.5±0.5	25	85
161	WF8 T18.2*12.5*9.5	18.2±0.6	12.5±0.5	9.5±0.5	50	110
162	WF8 T18.4*14.3*9.5	18.4±0.6	14.3±0.5	9.5±0.5	50	115
163	WF8 T19*11*13	19±0.6	11±0.5	13±0.5	30	80
164	WF8 T19.5*12.7*9.5	19.5±0.6	12.7±0.5	9.5±0.5	50	120
165	WF8 T20*5*10	20±0.6	5±0.4	10±0.5	25	75
166	WF8 T20*7*10	20±0.6	7±0.4	10±0.5	30	80
167	WF8 T20*8*10	20±0.6	8±0.4	10±0.5	35	90
168	WF8 T20*10*10	20±0.6	10±0.4	10±0.5	40	95
169	WF8 T20*15*10	20±0.6	15±0.5	10±0.5	65	135
170	WF8 T20.8*30*11.6	20.8±0.6	30±0.5	11.6±0.5	90	200
171	WF8 T21*13*12	21±0.6	13±0.5	12±0.5	35	95
172	WF8 T21*12*13.2	21±0.6	12±0.5	13.2±0.5	30	85

● Detailed specification and parameter introduction

詳細規格及參數介紹：

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω)min	
					25 MHz	100 MHz
173	WF8 T21*6*12.7	21 \pm 0.6	6 \pm 0.4	12.7 \pm 0.5	20	75
174	WF8 T22*8*14	22 \pm 0.6	8 \pm 0.4	14 \pm 0.5	30	80
175	WF8 T22.5*6.4*13.8	22.5 \pm 0.6	6.4 \pm 0.4	13.8 \pm 0.5	25	75
176	WF8 T22.5*6.4*14.3	22.5 \pm 0.6	6.4 \pm 0.4	14.3 \pm 0.5	25	70
177	WF8 T22.5*8*13.8	22.5 \pm 0.6	8 \pm 0.4	13.8 \pm 0.5	30	80
178	WF8 T22.5*10*13.8	22.5 \pm 0.6	10 \pm 0.4	13.8 \pm 0.5	35	90
179	WF8 T22.5*9.5*13.5	22.5 \pm 0.6	9.5 \pm 0.4	13.5 \pm 0.5	30	85
180	WF8 T22.5*12.7*13.5	22.5 \pm 0.6	12.7 \pm 0.5	13.5 \pm 0.5	40	95
181	WF8 T23*10*18	23 \pm 0.6	10 \pm 0.4	18 \pm 0.4	20	70
182	WF8 T23.5*9.5*12.7	23.5 \pm 0.6	9.5 \pm 0.4	12.7 \pm 0.5	35	90
183	WF8 T24*14*11.4	24 \pm 0.6	14 \pm 0.5	11.4 \pm 0.5	50	120
184	WF8 T25*8*15	25 \pm 0.6	8 \pm 0.4	15 \pm 0.5	25	80
185	WF8 T25*10*15	25 \pm 0.6	10 \pm 0.4	15 \pm 0.5	30	85
186	WF8 T25*12*15	25 \pm 0.6	12 \pm 0.5	15 \pm 0.5	45	96
187	WF8 T25*15*13	25 \pm 0.6	15 \pm 0.5	13 \pm 0.5	55	125
188	WF8 T25*15*15	25 \pm 0.6	15 \pm 0.5	15 \pm 0.5	50	115
189	WF8 T26*8*16	26 \pm 0.6	8 \pm 0.4	16 \pm 0.6	25	80
190	WF8 T26*15*13	26 \pm 0.6	15 \pm 0.5	13 \pm 0.5	50	120
191	WF8 T28*7.5*16	28 \pm 0.7	7.5 \pm 0.4	16 \pm 0.6	30	80
192	WF8 T28*8*18	28 \pm 0.7	8 \pm 0.4	18 \pm 0.6	25	80
193	WF8 T28*10*16	28 \pm 0.7	10 \pm 0.4	16 \pm 0.6	35	90
194	WF8 T28*10*18	28 \pm 0.7	10 \pm 0.4	18 \pm 0.6	30	85
195	WF8 T28*13*16	28 \pm 0.7	13 \pm 0.5	16 \pm 0.6	50	110
196	WF8 T28*20*16	28 \pm 0.7	20 \pm 0.5	16 \pm 0.6	50	135
197	WF8 T28.5*28.5*13.8	28.5 \pm 0.7	28.5 \pm 0.7	13.8 \pm 0.5	120	250
198	WF8 T28*28*16	28 \pm 0.7	28 \pm 0.7	16 \pm 0.6	85	200
199	WF8 T29*7.7*19	29 \pm 1.0	7.7 \pm 0.4	19 \pm 0.6	28	77
200	WF8 T29*10*19	29 \pm 1.0	10 \pm 0.4	19 \pm 0.6	33	92
201	WF8 T29*12*19	29 \pm 1.0	12 \pm 0.5	19 \pm 0.6	35	90
202	WF8 T29*13.8*19	29 \pm 1.0	13.8 \pm 0.5	19 \pm 0.6	48	96
203	WF8 T29*15*19	29 \pm 1.0	15 \pm 0.5	19 \pm 0.6	35	100

● Detailed specification and parameter introduction

詳細規格及參數介紹：

UNIT: mm

NO	SIZE CODE	A	B	C	Impedance(Ω)min	
					25 MHz	100 MHz
204	WF8 T31*5*19	31 \pm 1.0	5 \pm 0.4	19 \pm 0.6	22	75
205	WF8 T31*7*19	31 \pm 1.0	7 \pm 0.4	19 \pm 0.6	25	80
206	WF8 T31*8*19	31 \pm 1.0	8 \pm 0.4	19 \pm 0.6	25	80
207	WF8 T31*10*19	31 \pm 1.0	10 \pm 0.4	19 \pm 0.6	35	90
208	WF8 T31*12*18	31 \pm 1.0	12 \pm 0.5	18 \pm 0.6	35	105
209	WF8 T31*12*21	31 \pm 1.0	12 \pm 0.5	21 \pm 0.6	30	85
210	WF8 T31*13*19	31 \pm 1.0	13 \pm 0.5	19 \pm 0.6	44	108
211	WF8 T31*16*19	31 \pm 1.0	16 \pm 0.5	19 \pm 0.6	55	120
212	WF8 T31*18*19	31 \pm 1.0	18 \pm 0.5	19 \pm 0.6	55	130
213	WF8 T35*6*20.8	35 \pm 1.0	6 \pm 0.5	20.8 \pm 0.6	33	80
214	WF8 T35*12.6*20.8	35 \pm 1.0	12.6 \pm 0.5	20.8 \pm 0.6	55	105
215	WF8 T36*10*20	36 \pm 1.0	10 \pm 0.4	20 \pm 0.6	33	75
216	WF8 T36*12*25	36 \pm 1.0	12 \pm 0.5	25 \pm 0.6	30	90
217	WF8 T36*12.7*25	36 \pm 1.0	12.7 \pm 0.5	25 \pm 0.6	36	88
218	WF8 T36*13*23	36 \pm 1.0	13 \pm 0.5	23 \pm 0.6	38	96
219	WF8 T36*20*23	36 \pm 1.0	20 \pm 0.6	23 \pm 0.6	55	120
220	WF8 T36*23*15	36 \pm 1.0	23 \pm 0.6	15 \pm 0.6	105	215
221	WF8 T40.6*15*27.4	40.6 \pm 1.5	15 \pm 0.5	27.4 \pm 0.6	44	95